

PRODUCT : LCD MODULE
MODEL NO. : TFT-G320480UTSW-1W-TP-E
SUPPLIER : TRULY SEMICONDUCTORS LTD.
DATE : June 5,2008



CERT. No. 946535
(ISO9001)



CERT. No. H002005
(ISO14001)

SPECIFICATION

Revision: 1.0

TFT-G320480UTSW-1W-TP-E

This module uses ROHS material

This specification maybe changed without any notice in order to improve performance or quality etc. Please contact TRULY R&D department for update specification and product status before design for this product or release the order.

TRULY SEMICONDUCTORS LTD:

CUSTOMER:

Quality Assurance Department: _____
Approved by:
Technical Department: _____

Approved by:

CONTENTS


- GENERAL INFORMATION
- EXTERNAL DIMENSIONS
- ABSOLUTE MAXIMUM RATINGS
- ELECTRICAL CHARACTERISTICS
- TIMING OF POWER SUPPLY
- BACKLIGHT CHARACTERISTICS
- ELECTRO-OPTICAL CHARACTERISTICS
- INTERFACE DESCRIPTION
- REFERENCE APPLICATION CIRCUIT
- REFERENCE INITIAL CODE
- RELIABILITY TEST
- INSPECTION CRITERION
- PRECAUTIONS FOR USING LCD MODULES
- PRIOR CONSULT MATTER
- FACTORY CONTACT INFORMATION

WRITTEN BY	CHECKED BY	APPROVED BY
XT LIU	GE JIAN YANG	ZHU JIN BAO

GENERAL INFORMATION

Item	Contents	Unit
LCD Type	TFT TRANSMISSIVE	/
Viewing direction	12:00	O' Clock
Module area(W × H)	55.66 × 84.04	mm ²
Viewing area (W×H)	48.56 × 76.3	mm ²
Active area (W×H)	46.56 × 69.84	mm ²
Number of Dots	320 × (RGB) × 480	/
Driver IC	D51E5TA7601	/
Colors	262K	/
Backlight Type	LED	/
Module Power consumption	468	mw
Interface Type	System parallel interface, RGB interface	/
Input voltage	2.8	V
Weigh	33.3	g

EXTERNAL DIMENSIONS

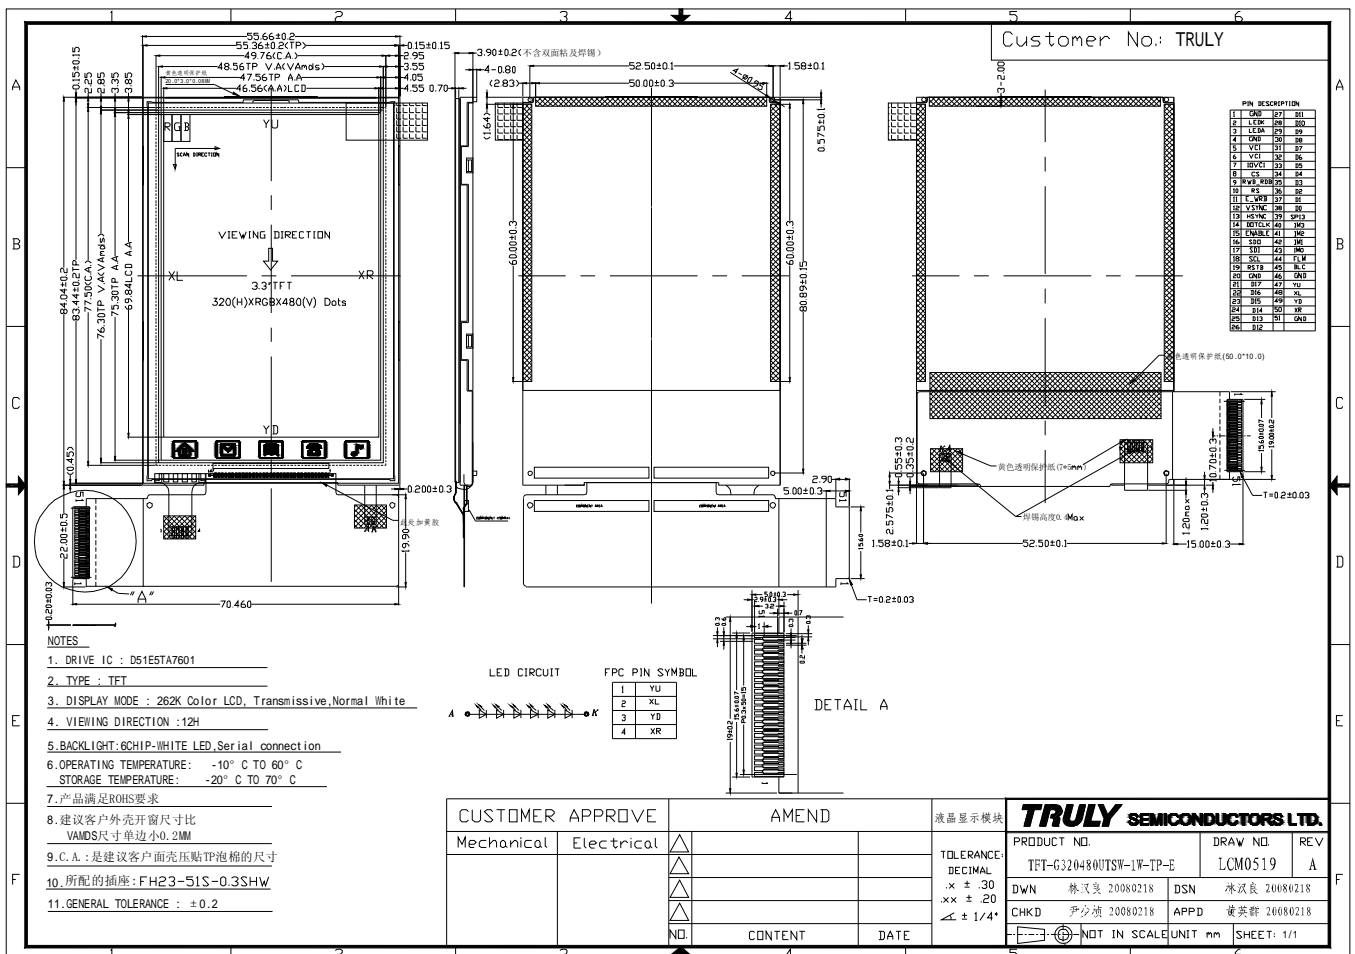

■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Supply voltage range	IOV_{CI}/V_{CI}	-0.3	4.6	V
Input voltage	V_{IN}	-0.3	$IOV_{CI}+0.3$	V
Operating temperature	T_{OP}	-10	60	°C
Storage temperature	T_{ST}	-20	70	°C
Humidity	RH	-	90%(Max60°C)	RH

■ ELECTRICAL CHARACTERISTICS

DC CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage for analog	V_{CI}	2.5	2.8	3.3	V
Supply voltage for I/O	IOV_{CI}	1.65	2.8/1.8	3.3	V
Input Current	I_{dd}	-	20.15	40.3	mA
Input voltage 'H' level	V_{IH}	$0.8IOV_{CI}$	-	IOV_{CI}	V
Input voltage 'L' level	V_{IL}	-0.3	-	$0.2IOV_{CI}$	V
Output voltage 'H' level	V_{OH}	$0.8IOV_{CI}$	-	-	V
Output voltage 'L' level	V_{OL}	-	-	$0.2IOV_{CI}$	V

■ TIMING OF POWER SUPPLY

PLEASE REFER TO THE DRIVER IC SPECIFICATION.

■ BACKLIGHT CHARACTERISTICS

Item	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward voltage	V_f	-	19.2	-	V	$I_f=15mA$ $T_a=25^\circ C$
Number of LED	-	6			Piece	-
Connection mode	S	Series			-	-

■ELECTRO-OPTICAL CHARACTERISTICS

Item	Symbol	Condition	Min	Typ	Max	Unit	Remark	Note
Response time	Tr+Tf	θ=0° ∅=0° Ta=25°C	---	31	47	ms	FIG 1.	4
Contrast ratio	Cr		300	711	---	---	FIG 2.	1
Luminance uniformity	δ WHITE		77	86	---	%	FIG 2.	3
Surface Luminance	Lv		244	305	---	cd/m ²	FIG 2.	2
Viewing angle range	θ	∅ = 90°	70	80	---	deg	FIG 3.	6
		∅ = 270°	61	71	---	deg	FIG 3.	
		∅ = 0°	70	80	---	deg	FIG 3.	
		∅ = 180°	68	78	---	deg	FIG 3.	
CIE (x, y) chromaticity	Red	x	0.5514	0.6014	0.6514	FIG 2.	5	
		y	0.3017	0.3517	0.4017			
	Green	x	0.2815	0.3315	0.3815			
		y	0.5392	0.5892	0.6392			
	Blue	x	0.0994	0.1494	0.1994			
		y	0.0273	0.0773	0.1273			
	White	x	0.2402	0.3002	0.3602			
		y	0.2658	0.3258	0.3858			

Note 1. Contrast Ratio(CR) is defined mathematically as For more information see FIG 2.

$$\text{Contrast Ratio} = \frac{\text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Average Surface Luminance with all black pixels (P1, P2, P 3,P4, P5)}}$$

Note 2. Surface luminance is the LCD surface from the surface with all pixels displaying white. For more information see FIG 2.

$$L_v = \text{Average Surface Luminance with all white pixels (P1, P2, P 3, P4, P5)}$$

Note 3. The uniformity in surface luminance , δ WHITE is determined by measuring luminance at each test position 1 through 5, and then dividing the maximum luminance of 5 points luminance by minimum luminance of 5 points luminance. For more information see FIG 2.

$$\delta \text{ WHITE} = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2, P 3, P4, P5)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2, P 3, P4, P5)}}$$

Note 4. Response time is the time required for the display to transition from White to black(Rise Time, Tr) and from black to white(Decay Time, Tf). For additional information see FIG 1. The test equipment is Autronic-Melchers's ConoScope. Series.

Note 5. CIE (x, y) chromaticity, The x, y value is determined by measuring luminance at each test position 1 through 5,and then make average value.

Note 6. Viewing angle is the angle at which the contrast ratio is greater than 2. For TFT module the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 3.

Note 7. For viewing angle and response time testing, the testing data is base on Autronic-Melchers's ConoScope. Series Instruments For contrast ratio, Surface Luminance, Luminance uniformity, CIE The test data is base on TOPCON's BM-5 photo detector.

FIG. 1 The definition of Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

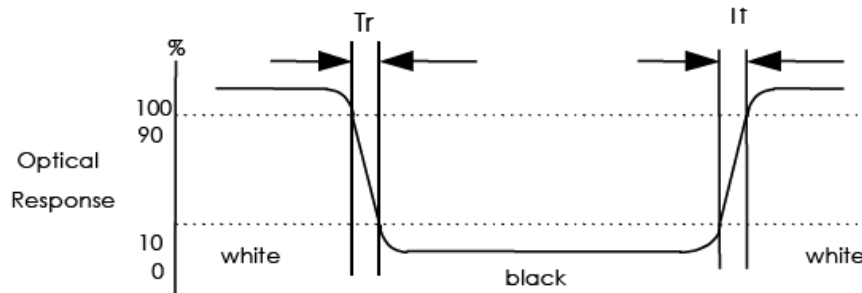


FIG. 2 Measuring method for Contrast ratio, surface luminance, Luminance uniformity , CIE (x, y) chromaticity


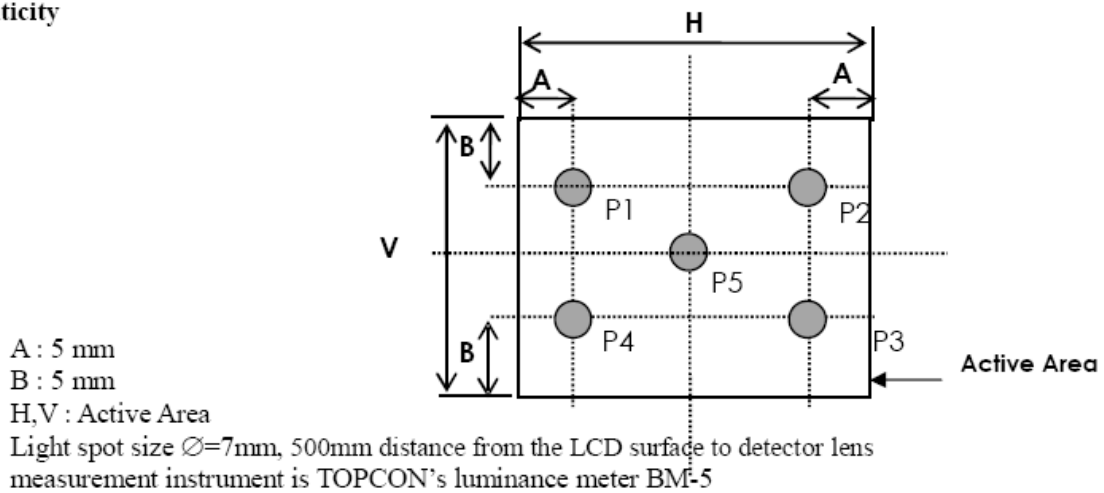


FIG. 3 The definition of viewing angle

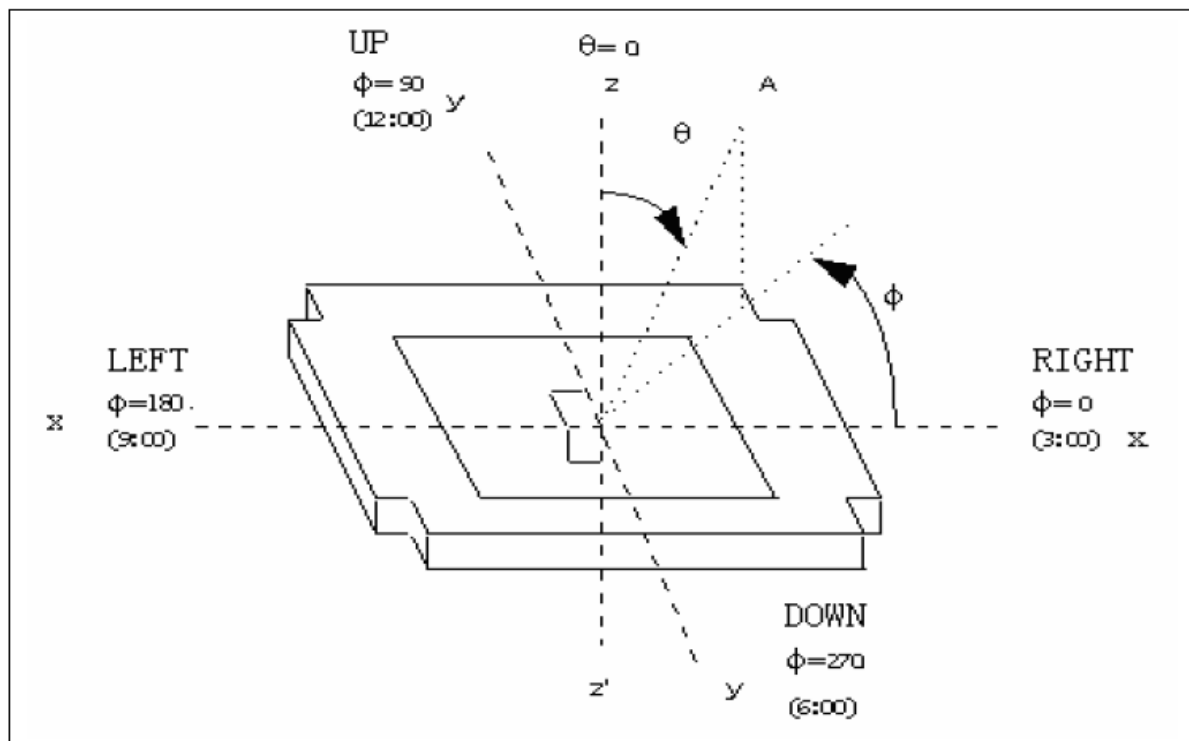

■ INTERFACE DESCRIPTION

Pin No.	Symbol	Level	Description	When no in use																																																																
1	GND	0V	Ground.	-																																																																
2	LEDK	-	LED light, cathode.	-																																																																
3	LEDA		LED light, anode.	-																																																																
4	GND	0V	Ground.	-																																																																
5~6	VCI	2.5~3.3V	Analog power supply.	-																																																																
7	IOVCI	1.65~3.3V	I/O power supply for external interface.	-																																																																
8	CS	H/L	Chip selection.	VSS																																																																
9	RWB_RDB	H/L	In M68 mode, this is used to select operation, read or write (RWB). In I80 mode, this serves as a read strobe signal (RDB).	IOVCI or VSS																																																																
10	RS	H/L	The signal for register index or register command select. Low: Register index or internal status (in read operation) High: Register command.	IOVCI or VSS																																																																
11	E_WRB	H/L	In M68 mode, this serves as a write/read enable strobe (E). In I80 mode, this serves as a write strobe signal (WRB).	-																																																																
12	VSYNC	H/L	Frame synchronizing signal.	IOVCI																																																																
13	HSYNC	H/L	Horizontal Line synchronizing signal.	IOVCI																																																																
14	DOTCLK	H/L	Dot clock signal.	IOVCI																																																																
15	ENABLE	H/L	A data ENABLE signal in the RGB I/F mode.	VSS or IOVCI																																																																
16	SDO	H/L	Serial data transfer output in the serial data transfer interface mode.	Open																																																																
17	SDI	H/L	Serial data transfer input/output in the serial data transfer interface mode.	IOVCI																																																																
18	SCL	H/L	In SPI mode, this serves as a synchronous clock (SCL).	-																																																																
19	RSTB	H/L	Reset pin. Setting this pin to low initializes the LSI. Must be reset after power is supplied.	-																																																																
20	GND	0V	Ground.	-																																																																
21~38	D17~D0	H/L	Data bus for SYSTEM I/F	-																																																																
			<table border="1"> <thead> <tr> <th colspan="2">Interface Mode</th> <th colspan="2">Description</th> </tr> <tr> <th>IM[3:0]</th> <th>Description</th> <th>Index</th> <th>Data</th> </tr> </thead> <tbody> <tr> <td>4;b0000</td> <td>M68, 16-bit bus interface</td> <td>D[8:1]</td> <td>D[17:10], D[8:1]</td> </tr> <tr> <td>4;b0001</td> <td>M68, 8-bit bus interface</td> <td>D[17:10]</td> <td>D[17:10]</td> </tr> <tr> <td>4;b0010</td> <td>I80, 16-bit bus interface</td> <td>D[8:1]</td> <td>D[17:10], D[8:1]</td> </tr> <tr> <td>4;b0011</td> <td>I80, 8-bit bus interface</td> <td>D[17:10]</td> <td>D[17:10]</td> </tr> <tr> <td>4;b010x</td> <td>Serial peripheral interface</td> <td>-</td> <td>-</td> </tr> <tr> <td>4;b011x</td> <td>Serial peripheral interface</td> <td>-</td> <td>-</td> </tr> <tr> <td>4;b1000</td> <td>M68, 18-bit bus interface</td> <td>D[8:1]</td> <td>D[17:0]</td> </tr> <tr> <td>4;b1001</td> <td>M68, 9-bit bus interface</td> <td>D[17:10]</td> <td>D[17:9]</td> </tr> <tr> <td>4;b1010</td> <td>I80, 18-bit bus interface</td> <td>D[8:1]</td> <td>D[17:0]</td> </tr> <tr> <td>4;b1011</td> <td>I80, 9-bit bus interface</td> <td>D[17:10]</td> <td>D[17:9]</td> </tr> <tr> <td>4;b1100</td> <td>Reserved</td> <td>-</td> <td>-</td> </tr> <tr> <td>4;b1110</td> <td>Reserved</td> <td>-</td> <td>-</td> </tr> <tr> <td>4;b1101</td> <td>Reserved</td> <td>-</td> <td>-</td> </tr> <tr> <td>4;b1111</td> <td>Reserved</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		Interface Mode		Description		IM[3:0]	Description	Index	Data	4;b0000	M68, 16-bit bus interface	D[8:1]	D[17:10], D[8:1]	4;b0001	M68, 8-bit bus interface	D[17:10]	D[17:10]	4;b0010	I80, 16-bit bus interface	D[8:1]	D[17:10], D[8:1]	4;b0011	I80, 8-bit bus interface	D[17:10]	D[17:10]	4;b010x	Serial peripheral interface	-	-	4;b011x	Serial peripheral interface	-	-	4;b1000	M68, 18-bit bus interface	D[8:1]	D[17:0]	4;b1001	M68, 9-bit bus interface	D[17:10]	D[17:9]	4;b1010	I80, 18-bit bus interface	D[8:1]	D[17:0]	4;b1011	I80, 9-bit bus interface	D[17:10]	D[17:9]	4;b1100	Reserved	-	-	4;b1110	Reserved	-	-	4;b1101	Reserved	-	-	4;b1111	Reserved	-	-
			Interface Mode		Description																																																															
			IM[3:0]		Description	Index	Data																																																													
			4;b0000		M68, 16-bit bus interface	D[8:1]	D[17:10], D[8:1]																																																													
			4;b0001		M68, 8-bit bus interface	D[17:10]	D[17:10]																																																													
			4;b0010		I80, 16-bit bus interface	D[8:1]	D[17:10], D[8:1]																																																													
			4;b0011		I80, 8-bit bus interface	D[17:10]	D[17:10]																																																													
			4;b010x		Serial peripheral interface	-	-																																																													
			4;b011x		Serial peripheral interface	-	-																																																													
			4;b1000		M68, 18-bit bus interface	D[8:1]	D[17:0]																																																													
			4;b1001		M68, 9-bit bus interface	D[17:10]	D[17:9]																																																													
			4;b1010		I80, 18-bit bus interface	D[8:1]	D[17:0]																																																													
			4;b1011		I80, 9-bit bus interface	D[17:10]	D[17:9]																																																													
			4;b1100		Reserved	-	-																																																													
			4;b1110		Reserved	-	-																																																													
			4;b1101		Reserved	-	-																																																													
			4;b1111		Reserved	-	-																																																													
			Data bus for RGB I/F																																																																	
			<table border="1"> <thead> <tr> <th colspan="2">Interface Mode</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td colspan="2">6-bit interface, 3-transfer</td> <td>D[17:12]</td> </tr> <tr> <td colspan="2">16-bit interface, 1-transfer</td> <td>D[17:13], D[11:1]</td> </tr> <tr> <td colspan="2">18-bit interface, 1-transfer</td> <td>D[17:0]</td> </tr> </tbody> </table>		Interface Mode		Description	6-bit interface, 3-transfer		D[17:12]	16-bit interface, 1-transfer		D[17:13], D[11:1]	18-bit interface, 1-transfer		D[17:0]																																																				
Interface Mode		Description																																																																		
6-bit interface, 3-transfer		D[17:12]																																																																		
16-bit interface, 1-transfer		D[17:13], D[11:1]																																																																		
18-bit interface, 1-transfer		D[17:0]																																																																		
Connected unused pins to the IOVCI or VSS level																																																																				

39	SPI3	H/L	Mode selection pin for Serial Peripheral Interface. If SPI3 = 0, 4-wire SPI mode If SPI3 = 1, 3-wire SPI mode. That is, SDI is bidirectional pin.	-																														
40~43	IM3~IM0	H/L	Select the MPU interface mode as listed below.	-																														
			<table border="1"> <thead> <tr> <th>IM[3:0]</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>4;b0000</td> <td>M68,16-bit bus interface</td> </tr> <tr> <td>4;b0001</td> <td>M68, 8-bit bus interface</td> </tr> <tr> <td>4;b0010</td> <td>I80, 16-bit bus interface</td> </tr> <tr> <td>4;b0011</td> <td>I80, 8-bit bus interface</td> </tr> <tr> <td>4;b010x</td> <td>Serial peripheral interface,16-bit stream IM[0] → ID</td> </tr> <tr> <td>4;b011x</td> <td>Serial peripheral interface, 18-bit stream IM[0] → ID</td> </tr> <tr> <td>4;b1000</td> <td>M68,18-bit bus interface</td> </tr> <tr> <td>4;b1001</td> <td>M68,9-bit bus interface</td> </tr> <tr> <td>4;b1010</td> <td>I80, 18-bit bus interface</td> </tr> <tr> <td>4;b1011</td> <td>I80, 9-bit bus interface</td> </tr> <tr> <td>4;b1100</td> <td>Reserved</td> </tr> <tr> <td>4;b1110</td> <td>Reserved</td> </tr> <tr> <td>4;b1101</td> <td>Reserved</td> </tr> <tr> <td>4;b1111</td> <td>Reserved</td> </tr> </tbody> </table>		IM[3:0]	Description	4;b0000	M68,16-bit bus interface	4;b0001	M68, 8-bit bus interface	4;b0010	I80, 16-bit bus interface	4;b0011	I80, 8-bit bus interface	4;b010x	Serial peripheral interface,16-bit stream IM[0] → ID	4;b011x	Serial peripheral interface, 18-bit stream IM[0] → ID	4;b1000	M68,18-bit bus interface	4;b1001	M68,9-bit bus interface	4;b1010	I80, 18-bit bus interface	4;b1011	I80, 9-bit bus interface	4;b1100	Reserved	4;b1110	Reserved	4;b1101	Reserved	4;b1111	Reserved
			IM[3:0]		Description																													
			4;b0000		M68,16-bit bus interface																													
			4;b0001		M68, 8-bit bus interface																													
			4;b0010		I80, 16-bit bus interface																													
			4;b0011		I80, 8-bit bus interface																													
			4;b010x		Serial peripheral interface,16-bit stream IM[0] → ID																													
			4;b011x		Serial peripheral interface, 18-bit stream IM[0] → ID																													
			4;b1000		M68,18-bit bus interface																													
			4;b1001		M68,9-bit bus interface																													
			4;b1010		I80, 18-bit bus interface																													
			4;b1011		I80, 9-bit bus interface																													
			4;b1100		Reserved																													
			4;b1110		Reserved																													
4;b1101	Reserved																																	
4;b1111	Reserved																																	
Note: When the serial interface is selected, the IM0 pin is used as an ID bit of the device code.																																		
44	FLM	H/L	Output a frame head pulse signal.	open																														
45	BLC	H/L	PWM signal for back light control.	open																														
46	GND	0V	Ground.	-																														
47	YU	-	Touch panel coordinate in the up side of envisage drawing.	-																														
48	XL	-	Touch panel coordinate in the left side of envisage drawing.	-																														
49	YD	-	Touch panel coordinate in the down side of envisage drawing.	-																														
50	XR	-	Touch panel coordinate in the right side of envisage drawing.	-																														
51	GND	0V	Ground.	-																														

■ APPLICATION CIRCUIT

Please consult our technical department for detail information.

■ INITIAL CODE

Please consult our technical department for detail information.

■ RELIABILITY TEST

No.	Test Item	Test Condition	Inspection after test
1	High Temperature Storage	70±2°C/200 hours	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1.Air bubble in the LCD; 2.Sealleak; 3.Non-display; 4.missing segments; 5.Glass crack; 6.Current Idd is twice higher than initial value. 7. The surface shall be free from damage. 8.Linearity must be no more than 1.5% by the linearity tester. 9..The Electric charact eristics requirements shall be satisfied.
2	Low Temperature Storage	-20±2°C/200 hours	
3	High Temperature Operating	60±2°C/120 hours	
4	Low Temperature Operating	-10±2°C/120 hours	
5	Temperature Cycle	-10±2°C~25~60±2°C×10cycles (30min.) (5min.) (30min.)	
6	Damp Proof Test	50°C±5°C×90%RH/120 hours	
7	Vibration Test	Frequency: 10Hz~55Hz~10Hz Amplitude: 1.5mm, X, Y, Z direction for total 3hours (Packing condition)	
8	Drooping test	Drop to the ground from 1m height, one time, every side of carton. (Packing condition)	
9	ESD test	Voltage:±8KV R: 330Ω C: 150pF Air discharge, 10time	
10	Hitting test	1,000,000 times in the same point, Hitting pad: tip R3.75 mm,Silicone rubber, Hardness:40 deg.; Load: 2.45N; Hitting speed: Twice/sec; Electric load: None; Test area should be at 1.8 mm inside of insulation.	
11	Pen sliding durability test	100, 000 times minimum Hitting pad: tip R0.8 mm Plastic pen; Load: 1.47N; Sliding speed: 60 mm/sec; Electric load: None Test area should be at 1.8 mm inside of insulation.	

Remark:

- The test samples should be applied to only one test item.
- Sample size for each test item is 5~10pcs.
- For Damp Proof Test, Pure water(Resistance > 10MΩ) should be used.
- In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judge as a good part.
- EL evaluation should be excepted from reliability test with humidity and temperature: Some defects such as black spot/blemish can happen by natural chemical reaction with humidity and Fluorescence EL has.
- Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.

■ INSPECTION CRITERION

TRULY [®] OUTGOING QUALITY STANDARD	PAGE 1 OF 8
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA	MDS Product

This specification is made to be used as the standard acceptance/rejection criteria for Color mobile phone LCM with touch pannel.

1 Sample plan


Sampling plan according to GB/T2828.1-2003/ISO 2859-1: 1999 and ANSI/ASQC Z1.4-1993, normal level 2 and based on:

Major defect: AQL 0.65

Minor defect: AQL 1.5

2. Inspection condition

Viewing distance for cosmetic inspection is about 30cm with bare eyes, and under an environment of 20~40W light intensity, all directions for inspecting the sample should be within 45° against perpendicular line.

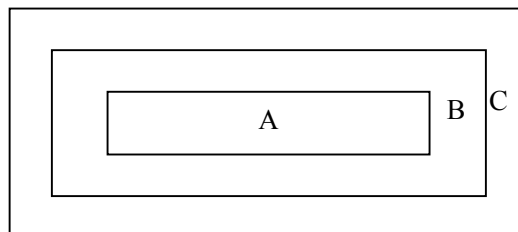3. Definition of inspection zone in LCD.

Zone A: character/Digit area

Zone B: viewing area except Zone A (ZoneA+ZoneB=minimum Viewing area)

Zone C: Outside viewing area (invisible area after assembly in customer's product)

Fig.1 Inspection zones in an LCD.

Note: As a general rule, visual defects in Zone C are permissible, when it is no trouble for quality and assembly of customer's product.

TRULY ® OUTGOING QUALITY STANDARD	PAGE 2 OF 8
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA	MDS Product

4. Inspection standards

4.1 Major Defect

Item No	Items to be inspected	Inspection Standard	Classification of defects
4.1.1	All functional defects	1) No display 2) Display abnormally 3) Missing vertical, horizontal segment 4) Short circuit 5) Back-light no lighting, flickering and abnormal lighting.	Major
4.1.2	Missing	Missing component	
4.1.3	Outline dimension	Overall outline dimension beyond the drawing is not allowed.	
4.1.4	linearity	No more than 1.5%	

4.2 Cosmetic Defect

Item No	Items to be inspected	Inspection Standard	Classification of defects																												
4.2.1	Clear Spots Black and white Spot defect Pinhole, Foreign Particle, polarizer Dirt	For dark/white spot, size Φ is defined as $\Phi = \frac{(x+y)}{2}$	Minor																												
		1.																													
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 20%;">Size(mm)</th> <th rowspan="2" style="width: 15%;">Zone</th> <th colspan="3" style="width: 45%;">Acceptable Qty</th> </tr> <tr> <th style="width: 15%;">A</th> <th style="width: 15%;">B</th> <th style="width: 15%;">C</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">$\Phi \leq 0.1$</td> <td></td> <td colspan="3" style="text-align: center;">Ignore</td> </tr> <tr> <td style="text-align: center;">$0.10 < \Phi \leq 0.15$</td> <td></td> <td colspan="3" style="text-align: center;">2</td> </tr> <tr> <td style="text-align: center;">$0.15 < \Phi \leq 0.20$</td> <td></td> <td colspan="3" style="text-align: center;">1</td> </tr> <tr> <td style="text-align: center;">$\Phi > 0.20$</td> <td></td> <td colspan="3" style="text-align: center;">0</td> </tr> </tbody> </table>		Size(mm)	Zone	Acceptable Qty			A	B	C	$\Phi \leq 0.1$		Ignore			$0.10 < \Phi \leq 0.15$		2			$0.15 < \Phi \leq 0.20$		1			$\Phi > 0.20$		0		
		Size(mm)				Zone	Acceptable Qty																								
				A	B		C																								
$\Phi \leq 0.1$		Ignore																													
$0.10 < \Phi \leq 0.15$		2																													
$0.15 < \Phi \leq 0.20$		1																													
$\Phi > 0.20$		0																													
		Ignore																													

OUTGOING QUALITY STANDARD			PAGE 3 OF 8																											
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA			MDS Product																											
Clear Spots TP Dirt	2.		<table border="1"> <thead> <tr> <th rowspan="2">Zone Size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td colspan="3">Ignore</td> </tr> <tr> <td>$0.10 < \Phi \leq 0.15$</td> <td colspan="3">3</td> </tr> <tr> <td>$0.15 < \Phi \leq 0.25$</td> <td colspan="3">2</td> </tr> <tr> <td>$0.25 < \Phi$</td> <td colspan="3">0</td> </tr> </tbody> </table>			Zone Size(mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.1$	Ignore			$0.10 < \Phi \leq 0.15$	3			$0.15 < \Phi \leq 0.25$	2			$0.25 < \Phi$	0			Minor	
	Zone Size(mm)	Acceptable Qty																												
		A	B	C																										
	$\Phi \leq 0.1$	Ignore																												
	$0.10 < \Phi \leq 0.15$	3																												
$0.15 < \Phi \leq 0.25$	2																													
$0.25 < \Phi$	0																													
Dim Spots Circle shaped and dim edged defects	3.		<table border="1"> <thead> <tr> <th rowspan="2">2. Zone Size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.2$</td> <td colspan="3">Ignore</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.40$</td> <td colspan="3">2</td> </tr> <tr> <td>$0.40 < \Phi \leq 0.60$</td> <td colspan="3">1</td> </tr> <tr> <td>$0.60 < \Phi$</td> <td colspan="3">0</td> </tr> </tbody> </table>			2. Zone Size(mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.2$	Ignore			$0.20 < \Phi \leq 0.40$	2			$0.40 < \Phi \leq 0.60$	1			$0.60 < \Phi$	0			Minor	
	2. Zone Size(mm)	Acceptable Qty																												
		A	B	C																										
	$\Phi \leq 0.2$	Ignore																												
	$0.20 < \Phi \leq 0.40$	2																												
$0.40 < \Phi \leq 0.60$	1																													
$0.60 < \Phi$	0																													

4.2. Cosmetic Defect

Item No	Items to be inspected	Inspection Standard					Classification of defects
4.2.2	Line defect Black line, White line, Foreign material on polarizer	Size(mm)		Acceptable Qty			Minor
		L(Length)	W(Width)	Zone			
				A	B	C	
		Ignore	$W \leq 0.02$	Ignore			
		$L \leq 3.0$	$0.02 < W \leq 0.03$	2			
		$L \leq 2.0$	$0.03 < W \leq 0.05$	1			
			$0.05 < W$	Define as spot defect			
		Ignore					

TRULY ® OUTGOING QUALITY STANDARD	PAGE 4 OF 8
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA	MDS Product



		Foreign material on TP film	The line can be seen after mobile phone in the operating condition: <table border="1" style="width: 100%; margin-top: 10px;"> <thead> <tr> <th colspan="2">size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th rowspan="2">L(Length)</th> <th rowspan="2">W(Width)</th> <th colspan="3">zone</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>Ignore</td> <td>$W \leq 0.03$</td> <td colspan="2">Ignore</td> <td rowspan="3">Ignore</td> </tr> <tr> <td>$L \leq 5.0$</td> <td>$0.03 < W \leq 0.05$</td> <td colspan="2">3</td> </tr> <tr> <td></td> <td>$0.05 < W$</td> <td colspan="2">Define as spot defect</td> </tr> </tbody> </table>	size(mm)		Acceptable Qty			L(Length)	W(Width)	zone			A	B	C	Ignore	$W \leq 0.03$	Ignore		Ignore	$L \leq 5.0$	$0.03 < W \leq 0.05$	3			$0.05 < W$	Define as spot defect			
size(mm)		Acceptable Qty																													
L(Length)	W(Width)	zone																													
		A	B	C																											
Ignore	$W \leq 0.03$	Ignore		Ignore																											
$L \leq 5.0$	$0.03 < W \leq 0.05$	3																													
	$0.05 < W$	Define as spot defect																													

4.2.3		Dim line defect Polarizer scratch TP film scratch	If the scratch can be seen after mobile phone cover assembling or in the operating condition, judge by the line defect of 4.2.2. If the scratch can be seen only in non-operating condition or some special angle, judge by the following. <table border="1" style="width: 100%; margin-top: 10px;"> <thead> <tr> <th colspan="2">Size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th rowspan="2">L(Length)</th> <th rowspan="2">W(Width)</th> <th colspan="3">Zone</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>Ignore</td> <td>$W \leq 0.03$</td> <td colspan="2">Ignore</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$5.0 < L \leq 10.0$</td> <td>$0.03 < W \leq 0.05$</td> <td colspan="2">2</td> </tr> <tr> <td>$L \leq 5.0$</td> <td>$0.05 < W \leq 0.08$</td> <td colspan="2">1</td> </tr> <tr> <td></td> <td>$0.08 < W$</td> <td colspan="2">0</td> </tr> </tbody> </table>	Size(mm)		Acceptable Qty			L(Length)	W(Width)	Zone			A	B	C	Ignore	$W \leq 0.03$	Ignore		Ignore	$5.0 < L \leq 10.0$	$0.03 < W \leq 0.05$	2		$L \leq 5.0$	$0.05 < W \leq 0.08$	1			$0.08 < W$	0		Minor	
Size(mm)		Acceptable Qty																																	
L(Length)	W(Width)	Zone																																	
		A	B	C																															
Ignore	$W \leq 0.03$	Ignore		Ignore																															
$5.0 < L \leq 10.0$	$0.03 < W \leq 0.05$	2																																	
$L \leq 5.0$	$0.05 < W \leq 0.08$	1																																	
	$0.08 < W$	0																																	

4.2.4		Polarize Air bubble	Air bubbles between glass & polarizer <table border="1" style="width: 100%; margin-top: 10px;"> <thead> <tr> <th rowspan="2">2. Zone Size(mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.2$</td> <td colspan="2">Ignore</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$0.20 < \Phi \leq 0.30$</td> <td colspan="2">2</td> </tr> <tr> <td>$0.30 < \Phi \leq 0.50$</td> <td colspan="2">1</td> </tr> <tr> <td>$0.50 < \Phi$</td> <td colspan="2">0</td> </tr> </tbody> </table>	2. Zone Size(mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.2$	Ignore		Ignore	$0.20 < \Phi \leq 0.30$	2		$0.30 < \Phi \leq 0.50$	1		$0.50 < \Phi$	0		Minor	
2. Zone Size(mm)	Acceptable Qty																								
	A	B	C																						
$\Phi \leq 0.2$	Ignore		Ignore																						
$0.20 < \Phi \leq 0.30$	2																								
$0.30 < \Phi \leq 0.50$	1																								
$0.50 < \Phi$	0																								

TRULY [®] OUTGOING QUALITY STANDARD	PAGE 5 OF 8
---	-------------


TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA	MDS Product
---	-------------

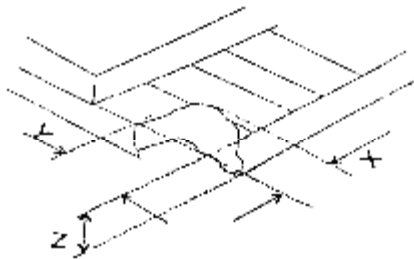Item No	Items to be inspected	Inspection Standard	Classification of defects												
4.3.5	Glass defect	<p style="text-align: center;">(i) Chips on corner A:LCD Glass defect</p>  <table border="1" style="margin: 10px auto;"> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">Y</td> <td style="text-align: center;">Z</td> </tr> <tr> <td style="text-align: center;">≤ 2.0</td> <td style="text-align: center;">$\leq S$</td> <td style="text-align: center;">Disregard</td> </tr> </table> <p style="text-align: center;">Notes: S=contact pad length Chips on the corner of terminal shall not be allowed to extend into the ITO pad or expose perimeter seal.</p> <p style="text-align: center;">B:TP Glass defect</p>  <table border="1" style="margin: 10px auto;"> <tr> <td style="text-align: center;">X(mm)</td> <td style="text-align: center;">Y(mm)</td> <td style="text-align: center;">Z(mm)</td> </tr> <tr> <td style="text-align: center;">≤ 3.0</td> <td style="text-align: center;">≤ 3.0</td> <td style="text-align: center;">Disregard</td> </tr> </table>	X	Y	Z	≤ 2.0	$\leq S$	Disregard	X(mm)	Y(mm)	Z(mm)	≤ 3.0	≤ 3.0	Disregard	Minor
X	Y	Z													
≤ 2.0	$\leq S$	Disregard													
X(mm)	Y(mm)	Z(mm)													
≤ 3.0	≤ 3.0	Disregard													

TRULY[®] OUTGOING QUALITY STANDARD PAGE 6 OF 8


TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA MDS Product

(ii) Usual surface cracks
A: LCD Glass defect

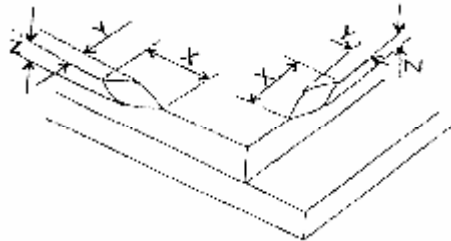

X	Y	Z
≤ 3.0	< Inner border line of the seal	Disregard


B: TP Glass defect



X(mm)	Y(mm)	Z(mm)
≤ 6.0	< 2.0	Disregard

Minor

(iii) Crack
Cracks tend to break are not allowed.

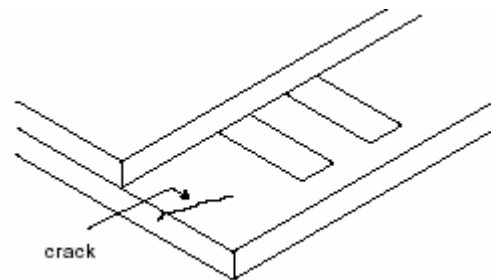

TRULY [®] OUTGOING QUALITY STANDARD	PAGE 7 OF 8
TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA	MDS Product

4.4 Parts Defect

Item No	Items to be inspected	Inspection Standard	Classification of defects
4.4.1 Parts contraposition	1、 Not allow IC and FPC/heat-seal lead width is more than 50% beyond lead pattern. 2、 Not allow chip or solder component is off center more than 50% of the pad outline.		
4.4.2 SMT	According to the <Acceptability of electronic assemblies> IPC-A-610C class 2 standard. Component missing or function defect are Major defect, the others are Minor defect.		

<p>TRULY[®] OUTGOING QUALITY STANDARD</p>	<p>PAGE 8 OF 8</p>
<p>TITLE:FUNCTIONAL TEST & INSPECTION CRITERIA</p>	<p>MDS Product</p>


4.4.3
TP Defect

1、 Pattern font:
Pattern fonts are clear and symmetrical, pattern fonts filter lightly are allowed; The font line is not allow to thinner or thicker than 1/3of normal size, and swing is not more than 0.1mm. the line is smooth and not broken.



图案字体 Pattern font

2、 The wing forward in the side of Visual Area:
The length of wing forward inside of the Visual Area: $n \leq 0.2\text{mm}$;
Not excess 3 point, and the distance $D \geq 20\text{mm}$.

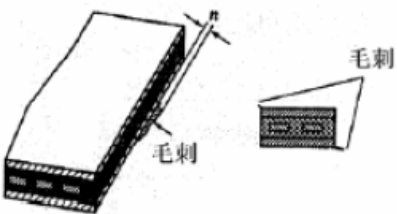

3、 Film impression:With operation, must be invisibility.
4、 Touch panel knob: if writing function normally,it could be allowed.



TP鼓 TP knob

5、 Newton ring
Without operation, the color circle of Regularity or Non-regularity from the normal or slope angle of view.

1、 **Regularity**: The area of the newton ring is less than 1/3 area of the touch panel; and no character affected and line distorted after touch panel lightening. It's ok.
2、 **Non-regularity** : The area of the Newton ring is less than the 1/2 area of touch panel with lightening. And no character affected and line



规律形



非规律形

■ PRECAUTIONS FOR USING LCD MODULES

Handing Precautions

(1) The display panel is made of glass and polarizer. As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring. Do not subject it to a mechanical shock by dropping it or impact.

(2) If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.

(3) Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary. Do not touch the display with bare hands. This will stain the display area and degraded insulation between terminals (some cosmetics are determined to the polarizer).

(4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully. Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.). Do not put or attach anything on the display area to avoid leaving marks on. Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizer. After products are tested at low temperature they must be warmed up in a container before coming is contacting with room temperature air.

(5) If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents

- Isopropyl alcohol
- Ethyl alcohol

Do not scrub hard to avoid damaging the display surface.

(6) Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.

- Water
- Ketone
- Aromatic solvents

Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading. Avoid contacting oil and fats.

(7) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.

(8) Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.

(9) Do not attempt to disassemble or process the LCD module.

(10) NC terminal should be open. Do not connect anything.

(11) If the logic circuit power is off, do not apply the input signals.

(12) Electro-Static Discharge Control, Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential. Be sure to ground the body when handling the LCD modules.

- Tools required for assembling, such as soldering irons, must be properly grounded. make certain the AC power source for the soldering iron does not leak. When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.

- To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions. To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended. As far as possible make the electric potential of your work clothes and that of the work bench the ground potential

- The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated

(13) Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.

- Do not alter, modify or change the shape of the tab on the metal frame.

- Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.

- Do not damage or modify the pattern writing on the printed circuit board.

- Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.

- Except for soldering the interface, do not make any alterations or modifications with a soldering iron.

- Do not drop, bend or twist LCM.

Handling precaution for LCM


LCM is easy to be damaged. Please note below and be careful for handling.

Correct handling:

As above picture, please handle with anti-static gloves around LCM edges.

Incorrect handling:


Please don't touch IC directly.

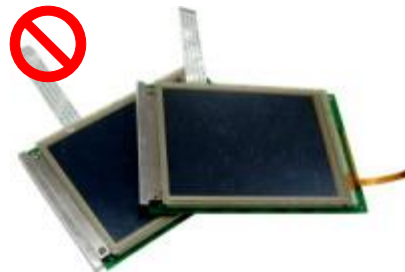

Please don't stack LCM.



Please don't hold the surface of panel.

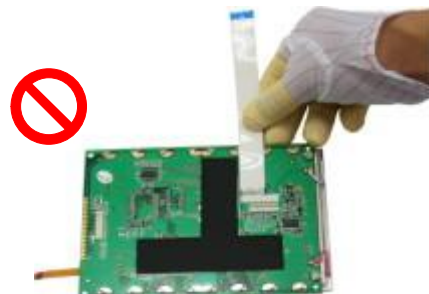

Please don't stretch interface of output, such as FPC cable.



Please don't hold the surface of IC.



Please don't operate with sharp stick such as pens.

Storage Precautions

When storing the LCD modules, the following precaution is necessary.

- (1) Store them in a sealed polyethylene bag. If properly sealed, there is no need for the dessicant.
- (2) Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C, and keep the relative humidity between 40%RH and 60%RH.
- (3) The polarizer surface should not come in contact with any other objects. (We advise you to store them in the anti-static electricity container in which they were shipped).

Others

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.

If the LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.

To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules.


- Exposed area of the printed circuit board.
- Terminal electrode sections.

■ USING LCD MODULES

Installing LCD Modules

The hole in the printed circuit board is used to fix LCM as shown in the picture below. Attend to the following items when installing the LCM.


- (1) Cover the surface with a transparent protective plate to protect the polarizer and LC cell.

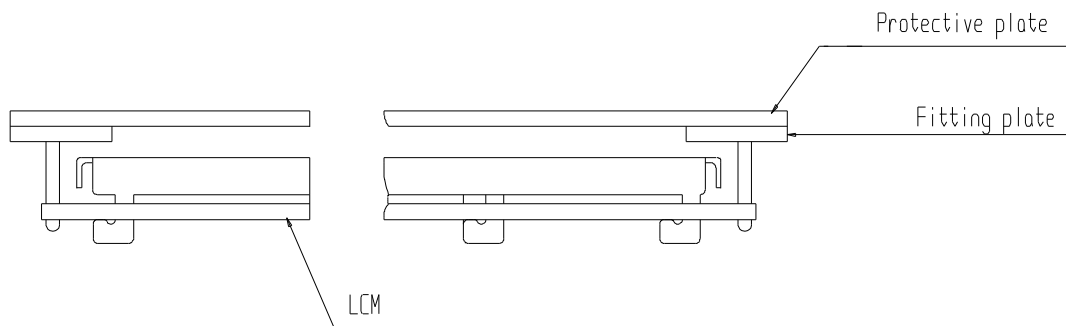

- (2) When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be ± 0.1 mm.

Precaution for assemble the module with BTB connector:

Please note the position of the male and female connector position, don't assemble or assemble like the method which the following picture shows

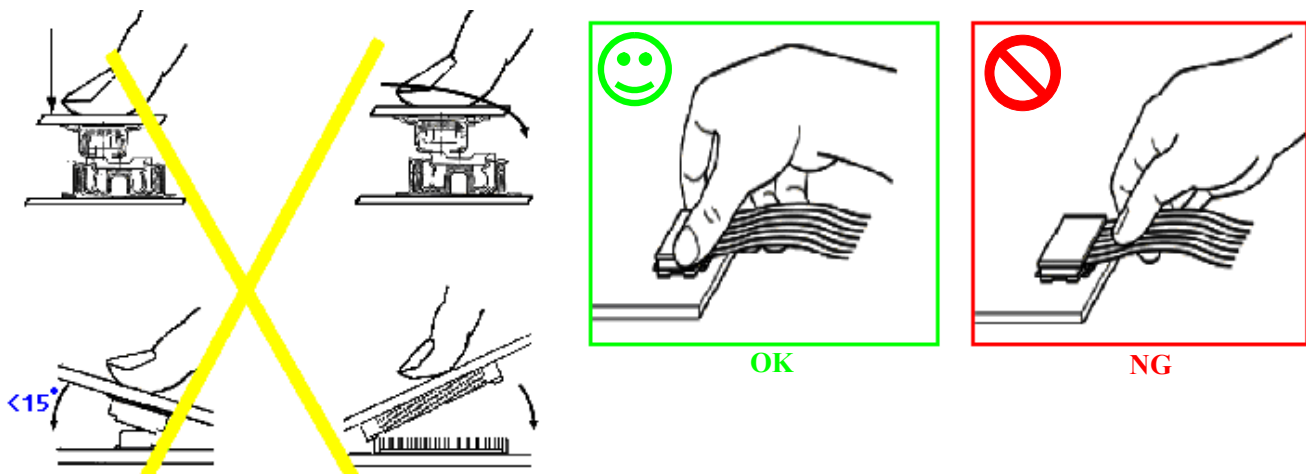

Precaution for soldering the LCM

	Manual soldering	Machine drag soldering	Machine press soldering
No ROHS product	290°C ~350°C. Time : 3-5S.	330°C ~350°C. Speed : 4-8 mm/s.	300°C ~330°C. Time : 3-6S. Press: 0.8~1.2Mpa
ROHS product	340°C ~370°C. Time : 3-5S.	350°C ~370°C. Time : 4-8 mm/s.	330°C ~360°C. Time : 3-6S. Press: 0.8~1.2Mpa

(1) If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.

(2) When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.

(3) When remove the electroluminescent panel from the PC board, be sure the solder has completely melted, the soldered pad on the PC board could be damaged.

Precautions for Operation

(1) Viewing angle varies with the change of liquid crystal driving voltage (VLCD). Adjust VLCD to show the best contrast.

(2) It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage than the limit cause the shorter LCD life. An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.

(3) Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, Which will come back in the specified operating temperature.

(4) If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.

(5) A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit. Usage under the maximum operating temperature, 50%RH or less is required.

(6) Input logic voltage before apply analog high voltage such as LCD driving voltage when power on. Remove analog high voltage before logic voltage when power off the module. Input each signal after the positive/negative voltage becomes stable.

(7) Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.

Safety

(1) It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.

(2) If any liquid leaks out of a damaged glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

Limited Warranty

Unless agreed between TRULY and customer, TRULY will replace or repair any of its LCD modules which are found to be functionally defective when inspected in accordance with TRULY LCD acceptance standards (copies available upon request) for a period of one year from date of production. Cosmetic/visual defects must be returned to TRULY within 90 days of shipment. Confirmation of such date shall be based on data code on product. The warranty liability of TRULY limited to repair and/or replacement on the terms set forth above. TRULY will not be responsible for any subsequent or consequential events.

Return LCM under warranty

No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are :

- Broken LCD glass.
- PCB eyelet is damaged or modified.
- PCB conductors damaged.
- Circuit modified in any way, including addition of components.
- PCB tampered with by grinding, engraving or painting varnish.
- Soldering to or modifying the bezel in any manner.

Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB eyelet, conductors and terminals.

■ PRIOR CONSULT MATTER

- 1.①For Truly standard products, we keep the right to change material, process ... for improving the product property without notice on our customer.
- ②For OEM products, if any change needed which may affect the product property, we will consult with our customer in advance.
- 2.If you have special requirement about reliability condition, please let us know before you start the test on our samples.

■ FACTORY

FACTORY NAME: TRULY SEMICONDUCTORS LTD.

FACTORY ADDRESS: Truly Industrial Area, ShanWei City,GuangDong,China

P.C: 516600 **URL:** <http://www.truly.com.hk> <http://www.trulysemi.com>